



RATINGS AND CHARACTERISTICS CURVES 7 \$


f & X Q O H V Q R W K B U Z L V H

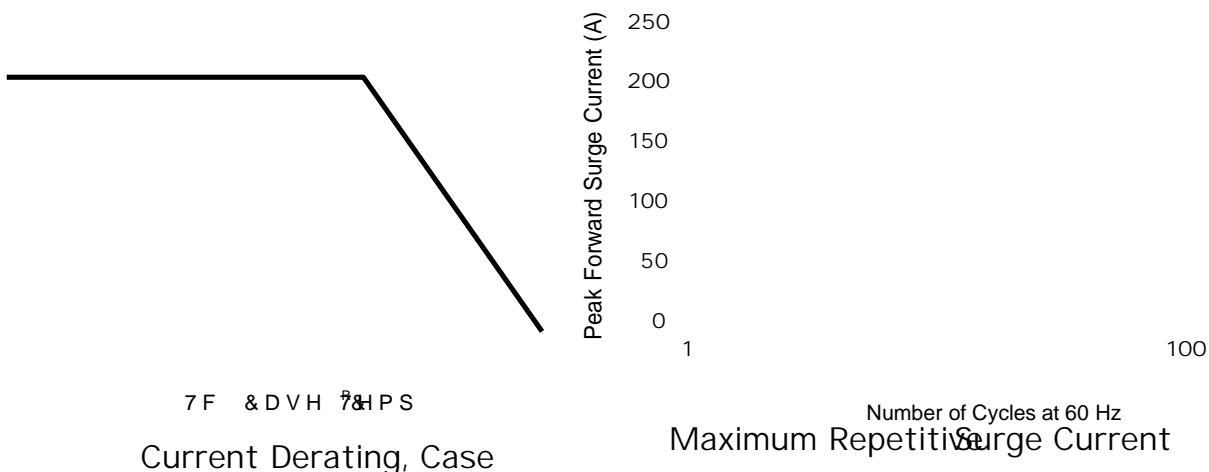

7 F & D V H 7 & I P S
Current Derating, Case

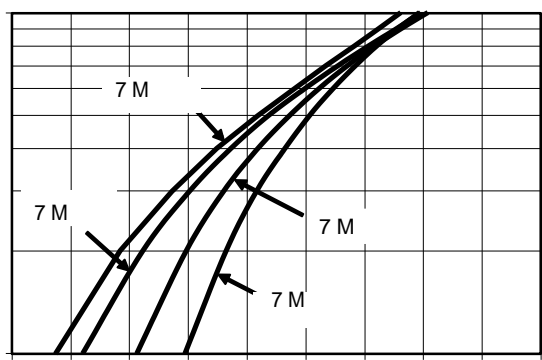


d C % o : μ v š] } v %] š v

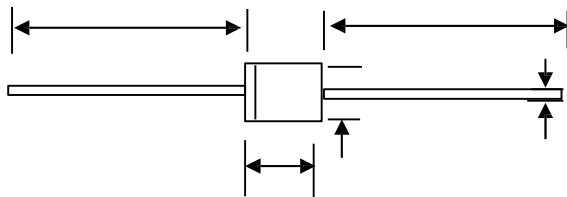PACKAGE OUTLINE DIMENSIONS**DO-201AD**

DO-201AD mechanical data


UNIT		A	B	C	D
mm	max	26.5	9.5	1.4	5.3
	min	24.5	7.3	1.1	4.8
mil	max	1043.30	374.01	5.1	208.67
	min	946.57	287.40		188.97

Marking Information

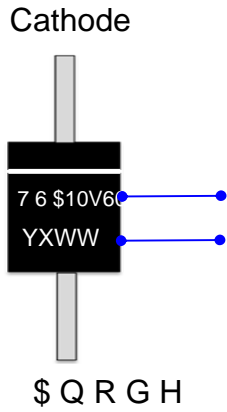

Product model : TSA10V60


PDC information

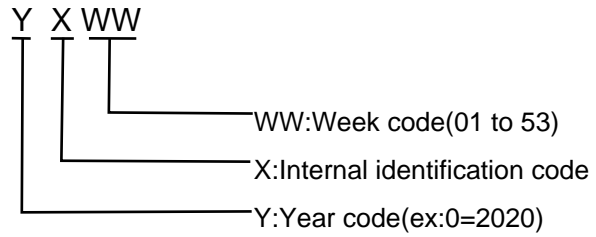

Packaging Information

1. Inside Box

2. Outside Box

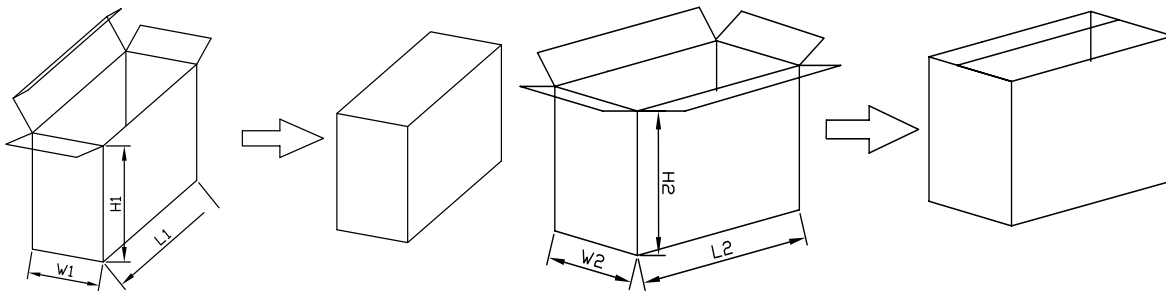

Packaging Information

NO	UNIT	Inside Box			Outside Box		
		L1	W1	H1	L2	W2	H2
Size	mm	255	75	1		210	320
QTY	PCS	Smallest package,1000PCS/carton			10,000PCS/carton,10 boxes in total		
Note	Tolerance	20mm,±3mm; 21-100mm,±5mm;		101-500mm,±10mm			