



7 UHQFK 026 %DUULHU 6FKRWWN\ 5H

TO-220AB
TSR60 / OCT



ITO-220AB
TSR60 / OCTF



Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDWRGWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$&'&GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKH'HLRQJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3 DUDPHWHU	6 \ PER O	/LPLW	8QLW
0D[LPXPHSHVSHUNYHYURQHW DJH	9550		9
0D[LPXPYHURJH ZDUG UFXEWHIHWG GHYLFH SHGLRGH	,) \$9		\$
3HDN IRVZDUEBUUHQW VLKDOHQH ZDYH VXSHULPSRVHGRFSGULRVGHG	,)60		\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW XUH UHQJH WR	72 %		f & WR
7\SLFVQCHUPDO USHVULVQHDQFH	5\$-&		

1RWHV

3XOVH WHV V\$XOVH ZLGWK GXW\ F\FOH

3XOVH WHVW 3XOPVH ZLGWK 0

TSR60 / OCT



TSR60 / CTF

129


RATINGS AND CHARACTERISTICS CURVES

7 \$


f & X Q O H V Q R W K B U Z L V H

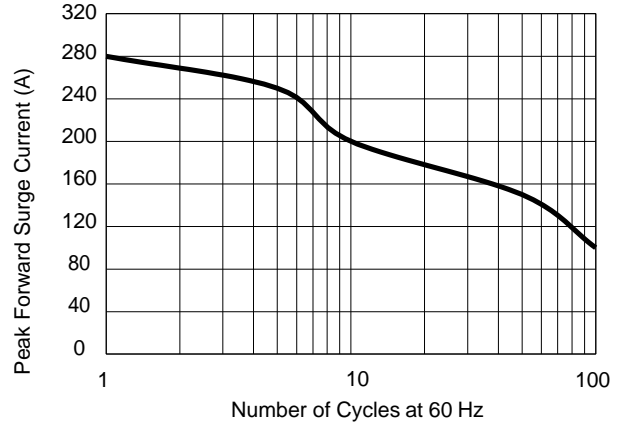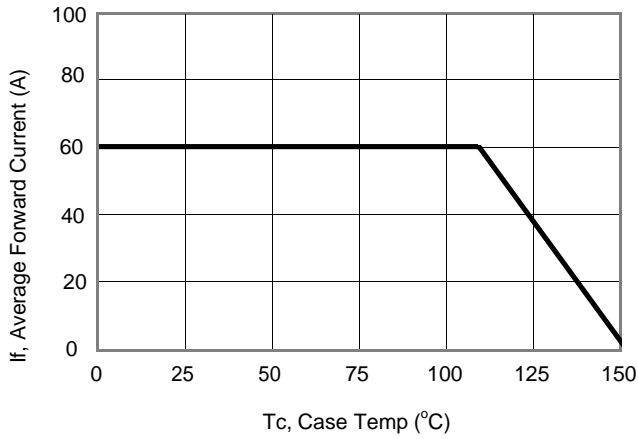


Current Derating, Case

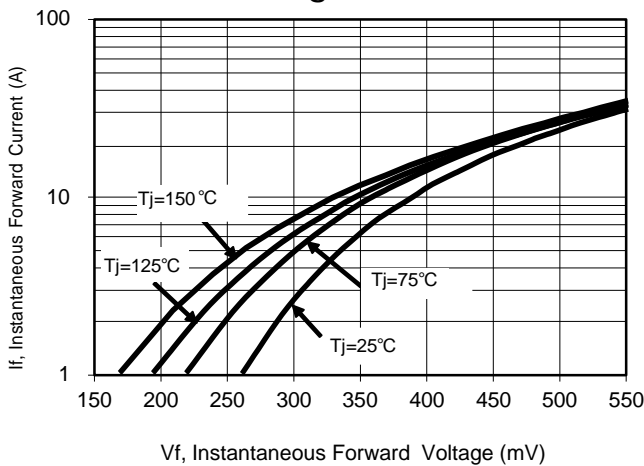

Maximum Repetitive Surge Current

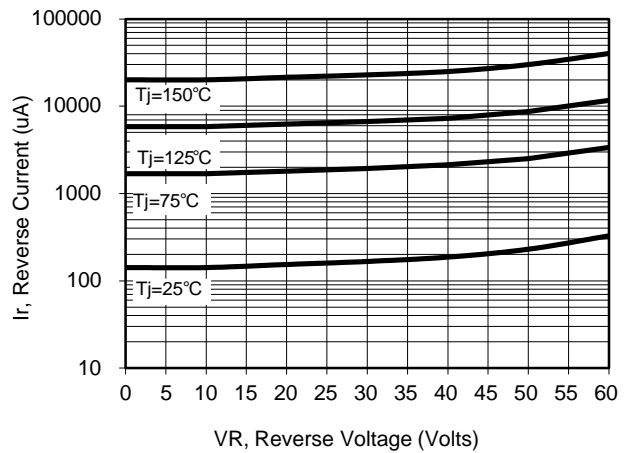

Typical Forward Voltage

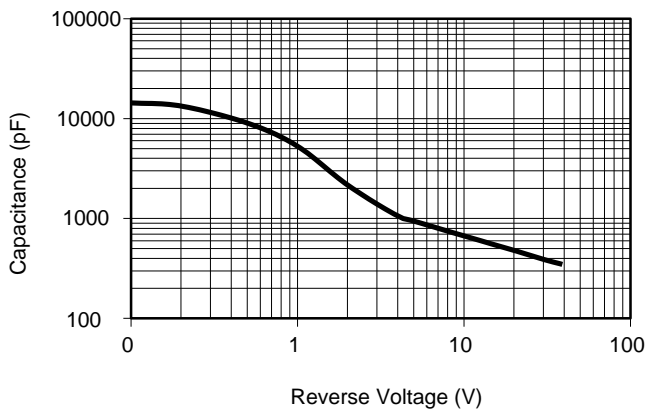


Typical Reverse Current

Typical Junction Capacitance

Marking Information

W : Company's trademark
3URGXFWTBRIGMO RU 765 /6 &7)
3' & LQIRUPDWLRQ

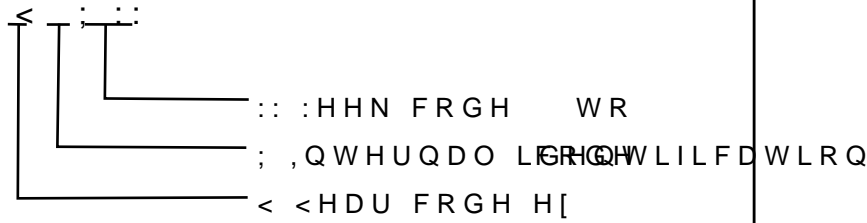

Packaging Information

7XEH 'LPHQVLRQV

,QVLGH %R[

2XWVLGH %R[

Packaging Information