




TO-220AB
TSR / & 7



ITO-220AB
TSR / & 7)

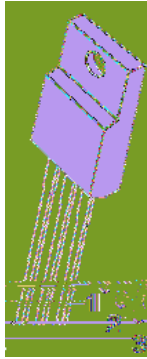


Features



- ‡ \$GYDQWUHGQFK WHFKQRORJ\
- ‡ /RZRUZDYGWDJH GURS
- ‡ /RZRZDURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

RATINGS AND CHARACTERISTICS CURVES


f & X Q O H V Q R W K B U Z L V H

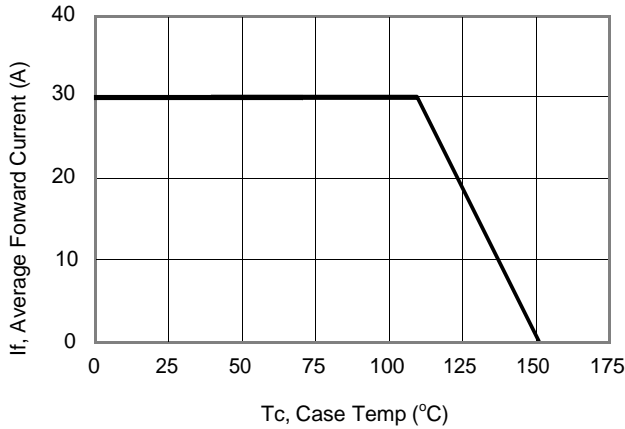


Current Derating, Case

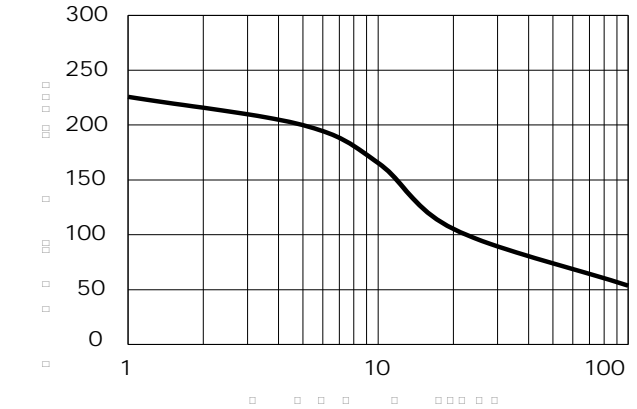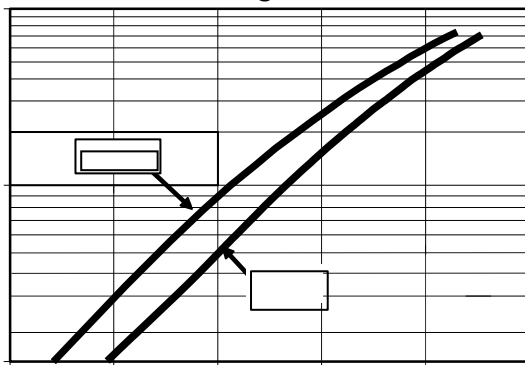

Maximum Repetitive Surge Current

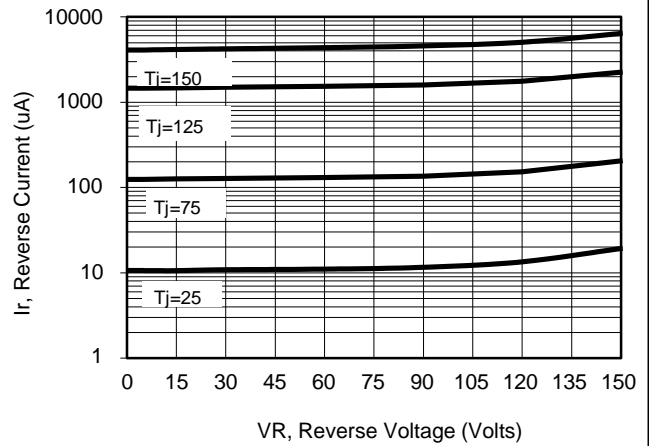


Typical Reverse Current

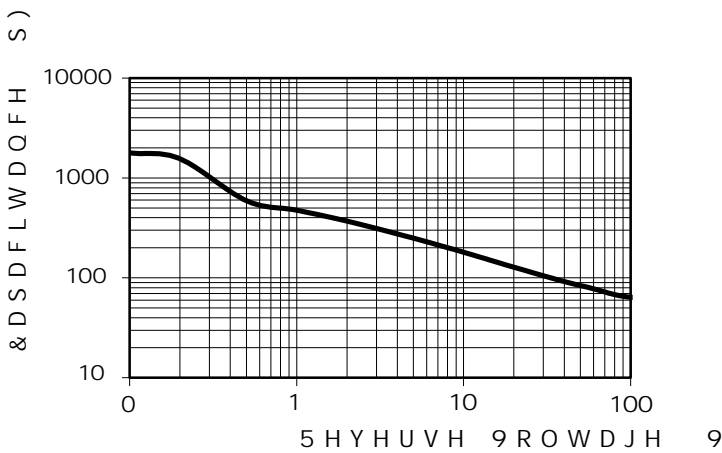


Typical Junction Capacitance


PACKAGE OUTLINE DIMENSIONS 47 184713888847 584710847 0(1

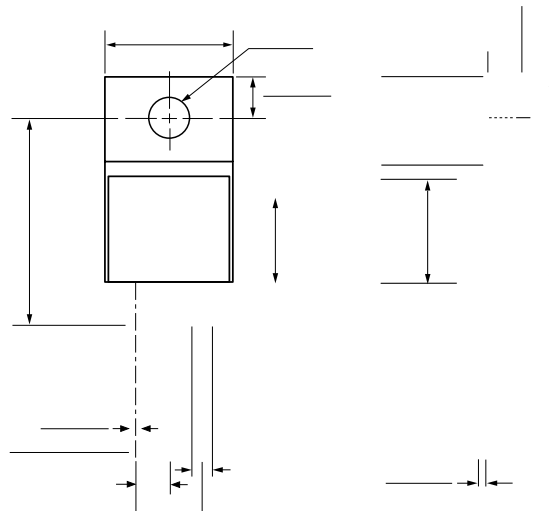

Marking Information

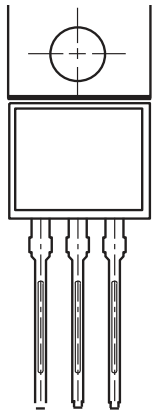


3 URGXFW 765 GHQ & 7 RU 7 6/5 & 7)
 3' & LQIRUPDWLRQ

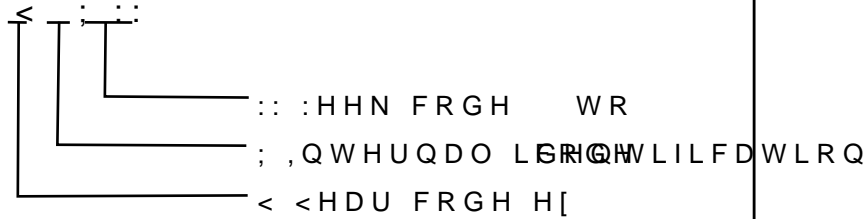

Packaging Information

7XEH 'LPHQVLRQV

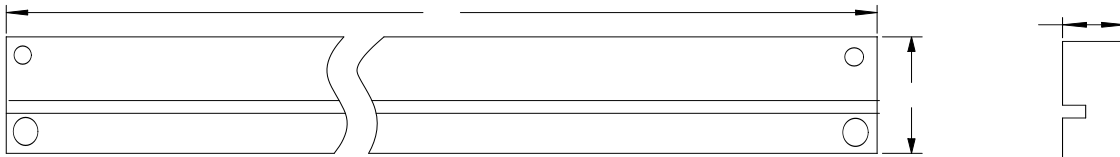

,QVLGH %R[

2XWVLGH %R[

Packaging Information

12	81,	7XEH 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6 LH	PP	\$	%	&	/	:	+	/	:	+
47 <	3 & 6	3 & 6 7XEH			6PDO SHFWDJH3 & 6 WXE VRWDO			3 & 6 FDUERGLWRWDO		
1 RW	H	7ROHUDQFH PP " PP			PP " PP			PP " PP		