

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
TSA 9



Cathode ← Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRQ
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡ )UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULPSHQHVRSGGLRGH		,) 60		\$
2SHUDMXQEDQGRWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFVCHUPDO USHVUVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRUJZDUG SHGLRGH	,) \$	7- f&	7 < 3	9
	,) \$	7- f&	0\$;	
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHQHVRQW UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$



1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\FFOH

3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7\$

QVVRWUZVHRWG

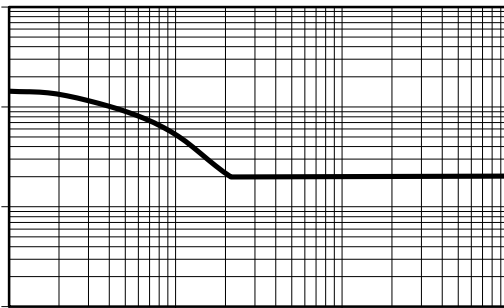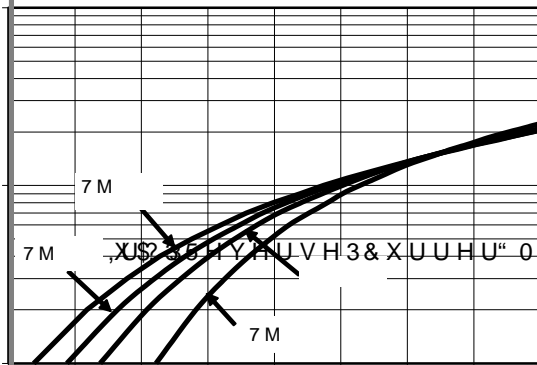


76\$ 9 5HY

:RUOG ,QWHUQDWLRQDO


76\$ 9

**PACKAGE OUTLINE DIMENSIONS**


**DO-201AD**

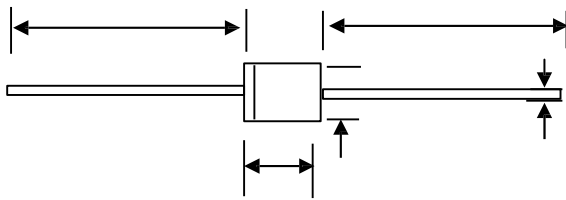

				C	
				1.4	
				1.1	
				5.1	




\$QRGH



DWU ] b[ '=bZcf aUh] cb

% =bg] XY 6cl

&' G hg] XY 6cl

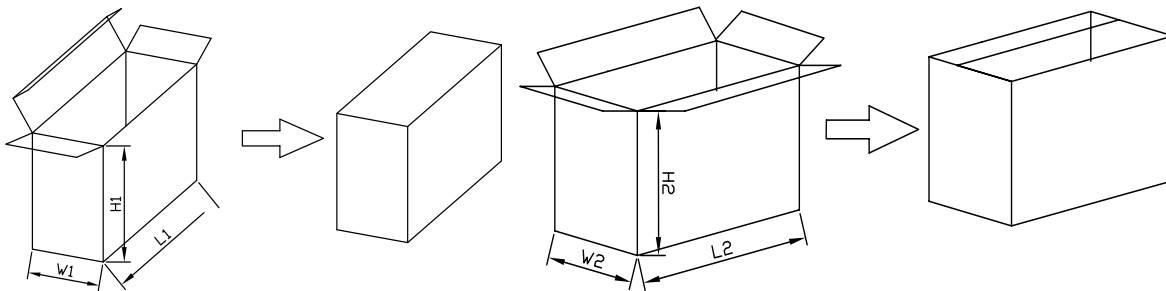

DWU ] b[ '=bZcf aUh] cb

BC	I B=H	=bg] XY6cl			G hg] XY6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
		&)	+) )	%			