

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

TO-220AB
TSR & 7



ITO-220AB
TSR & 7)



Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZDURGDWDJH GURS
- ‡ /RZRZDURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & \$GDSWRUV
- ‡ 6ZLWFKRZDUXSSOLHV
- ‡)UHHZKH'HLRQJ




Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)


3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPXPHSHVSHUNYHYURQHW DJH		9550		9
0D[LPXPHYHURJHZDUG UFKUWHIHWG		,) \$9		\$
GHYLFH SHGLRGH				
3HDN IRVZDURBUHQW VLQDQH ZDYH		,) 60		\$
VXSHULPSRVHGRFSGUDRCHG				
2SHUDMXQDQGRQWRUDJH WHPSHUDW		XOH 060JH	WR	f &
7\SLFVCHUPDO USHVULVQHDQFH		5\$ - &		f & :
72 \$% , 72 \$%				
, QVWDQWDQHRXU UFKUWHIHWG SHGLRGH		9)	7 < 3	0\$;
, QVWDQWDQHRXU UFKUWHIHWG UDWHYHYURQHW DJH		, 5		X\$
				P\$

1RWHV
3XOVH WHVVSXOVH ZLGWK GXW\ F\FOH
3XOVH WHVW 3XOPVH ZLGWK 0


PACKAGE OUTLINE DIMENSIONS

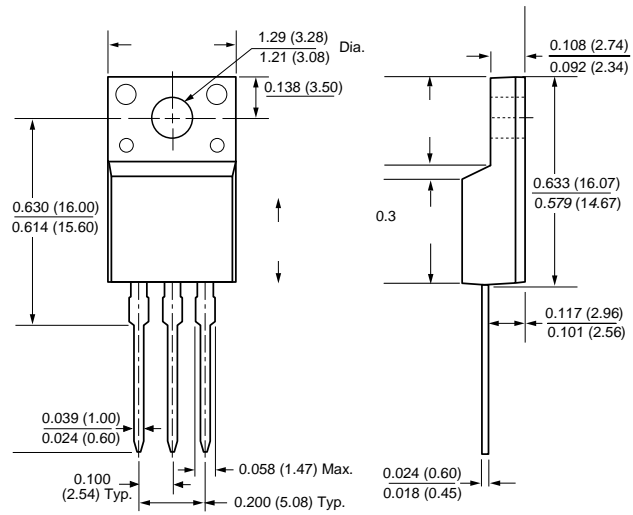

Marking Information

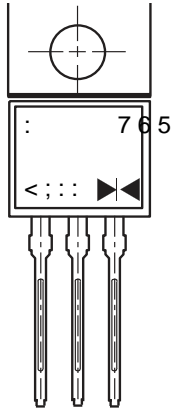


3URGXFW 765 910 & 7RU 765 (7)
 3' & LQIRUPDWLRQ

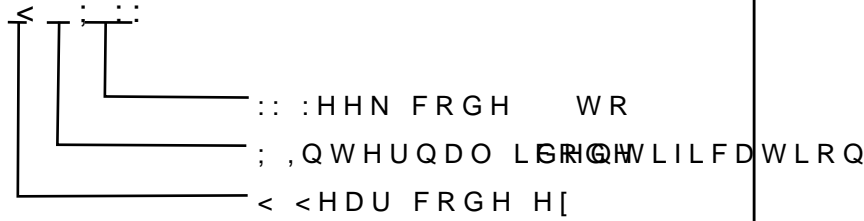

Packaging Information

7XEH 'LPHQVLRQV

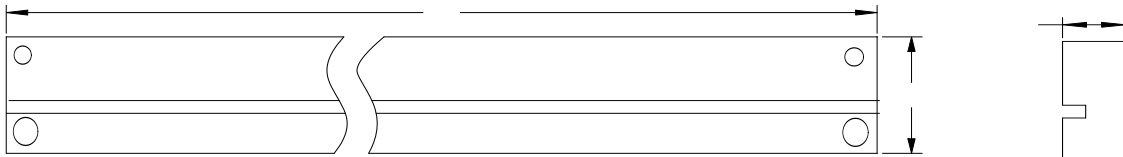

,QVLGH %R[

2XWVLGH %R[

Packaging Information

12	81,	7XEH 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6L]H	PP	\$	%	&	/	:	+	/	:	+
47<	3&6	3&6 7XEH			6PDOO & 7RU 765 (7) WXE 910 & 7RU 765 (7)			3&6 FDUERQWLILFDWLRQ		
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		